


| | |
|---------------|--|
| Date: | |
| Project Name: | |
| SKU #: | |

ICON R2™

Icon Series Round Downlight 2"



RBT - Round Baffled Trim



RTL - Round Trimless

APPLICATIONS

Residential, Commercial, Multi-Family Complex

FEATURES**Construction**

- Aluminum Housing

Finish- White
- Black Trim [Option]**Electrical & Technical**

- Input Voltage: 120VAC
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/3500K/4000K/5000K
- Operating Temp.: -4°F ~ 104°F
- Wet Location Rated
- IC Air-Tight Rated

Optical

- White PC Lens
- Available Beam Angles:
 - 24°
 - 38°
 - 60°

Installation/Mounting

- Spring Clip Mount [W/Trim]
- Flush to Ceiling [Trimless]

Controls

- Triac Dimming

Compliance


- JA8 TITLE 24 Compliant

Lumen Output

- 2"/8W: 600lm
- 2"/15W: 1000lm



Warranty

- 5 Year Warranty
- See warranty documentation for more information.

**ORDERING INFORMATION****EXAMPLE: ICON-R-2-8-5C-24-RBT-WH**

| Series | Size | Wattage | CCT | Beam Angle | Trim Type | Trim Finish | Options |
|--------|--------|--------------------|--|----------------------------------|--|--------------------------|--|
| ICON-R | 2 - 2" | 8 - 8W 15 - 15W | 5C - 2700K/3000K/ 3500K/4000K/5000K | 24 - 24° 38 - 38° 60 - 60° | RBT - Round Baffled Trim RTL - Round Trimless | BK - Black WH - White | ICON-R-NC [New Construction Plate W/ Hanger Bar] FLEX-4 [4' Flexible Connector] FLEX-6 [6' Flexible Connector] FLEX-10 [10' Flexible Connector] FLEX-20 [20' Flexible Connector] |


DIMENSIONS

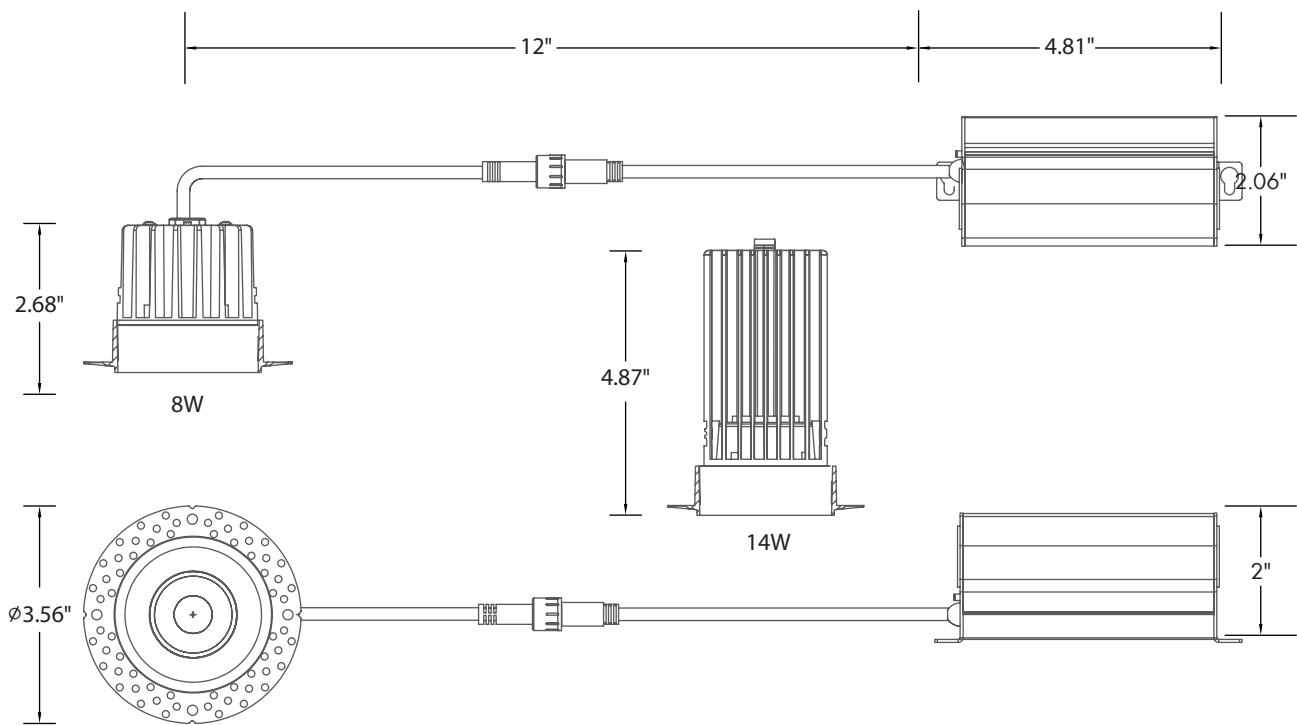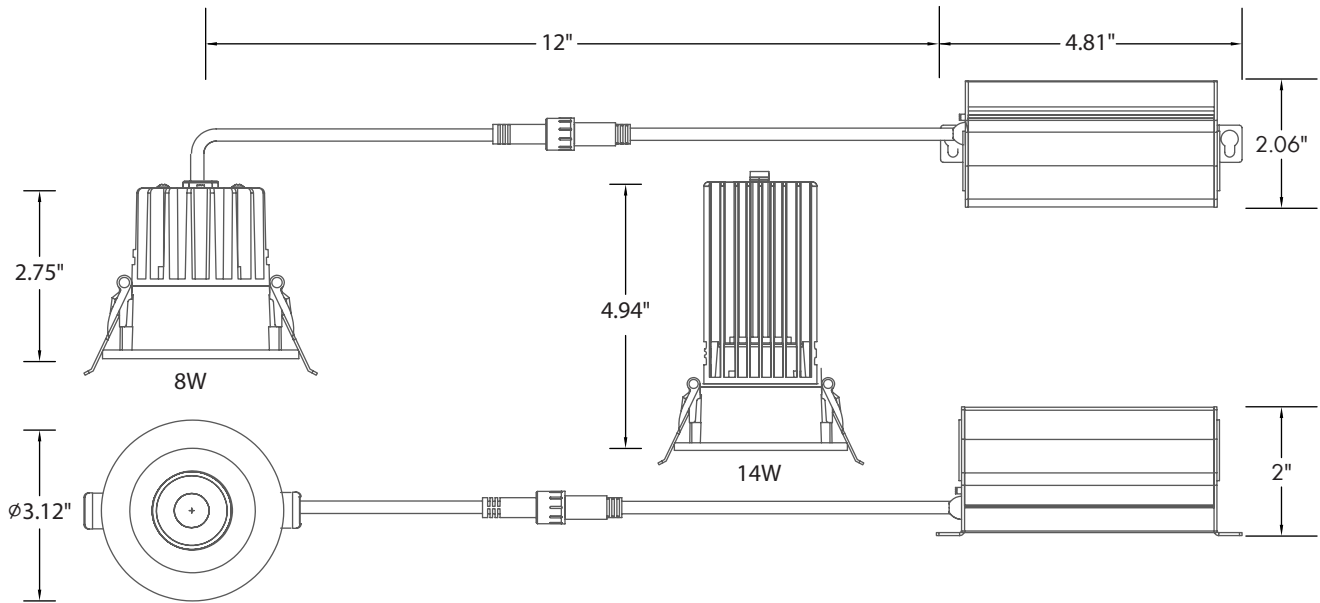

LUMEN OUTPUT

| SKU | Size (in) | Wattage (W) | Delivered Lumens (lm) | Efficacy (lm/W) |
|--------------------------|-----------|-------------|-----------------------|-----------------|
| ICON-R-2-8-5C-38-RBT-WH | 2 | 8 | 600 | 75 |
| ICON-R-2-15-5C-38-RBT-WH | 2 | 15 | 1000 | 66 |


ACCESSORIES

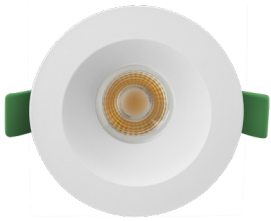

Round Baffled Trim [RBT]



Round Trimless [RTL]

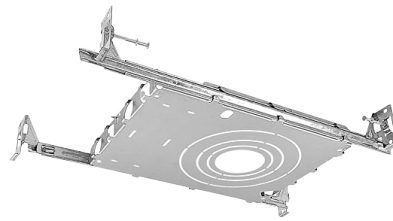

New Construction Kit W/ Hanger Bar 2"/3"/3.5"/4" [ICON-R-NC]

COMPLETED PRODUCT



ICON R2™
Round Baffled Trim



ICON R2™
Round Trimless