

Date:	
Project Name:	
SKU #:	

## Impakt™ XS

Architectural Floodlight



### MOUNTING OPTIONS



Knuckle Mount  
(1/2" Thread)  
[KN]



Trunnion  
[TR]

### APPLICATIONS

Commercial Parking Lots, Pedestrian Pathways, Street Lighting

### FEATURES

#### Construction

- Rugged Die-cast Aluminum Housing
- High Impact PC Injection Lens with Rubber Seal Ensuring IP65 Rating.

#### Finish

- Dark Bronze [Standard]
- Matte White
- Matte Black
- Matte Gray

#### Electrical & Technical

- Input Voltage: 120-277VAC
- Input Frequency: 50/60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: 70
- THD: <20%
- CCT: 3000K, 4000K, 5000K, or 5700K
- Operating Temp.: -40°F ~ 104°F
- IP Rating: IP65 Enclosure
- 10kV Surge Protection [Option]

#### Optical

- Distribution Type:
  - NEMA5 [H5V5]
  - NEMA7 [H7V6]

#### Installation/Mounting

- Knuckle Mount (1/2 thread)
- Trunnion

#### Controls

- 0-10V Dimming [Standard]
- Button Photocell [Option]

#### Lumen Output

- 20W: 2700lm
- 30W: 4050lm

#### Warranty

- 5 Year Warranty  
See warranty documentation for more information.



## ORDERING INFORMATION


EXAMPLE: IPF-XS-20-50-U-D0-D-07-KN

Series	Size	Wattage	CCT	Input Voltage	Controls Option	Finish	Distribution	Mount
IPF	XS - Extra Small	20 - 20W 30 - 30W	30 - 3000K 40 - 4000K 50 - 5000K 57 - 5700K	U - 120-277VAC	D0 (Without Control Sensors) PH (Button Photocell)	D - Dark Bronze G - Gray* B - Black* W - White*	05 - NEMA5 [H5V5] 07 - NEMA7 [H7V6]	KN - Knuckle Mount TR - Trunnion

#### Accessories

- IPF-XS-TV (Top Visor)
- IPF-XS-BV (Bottom Visor)
- IPF-XS-WG (Wire Guard)
- IPF-SP10 (Surge Protection 10kV/5kA)

DIMENSIONS

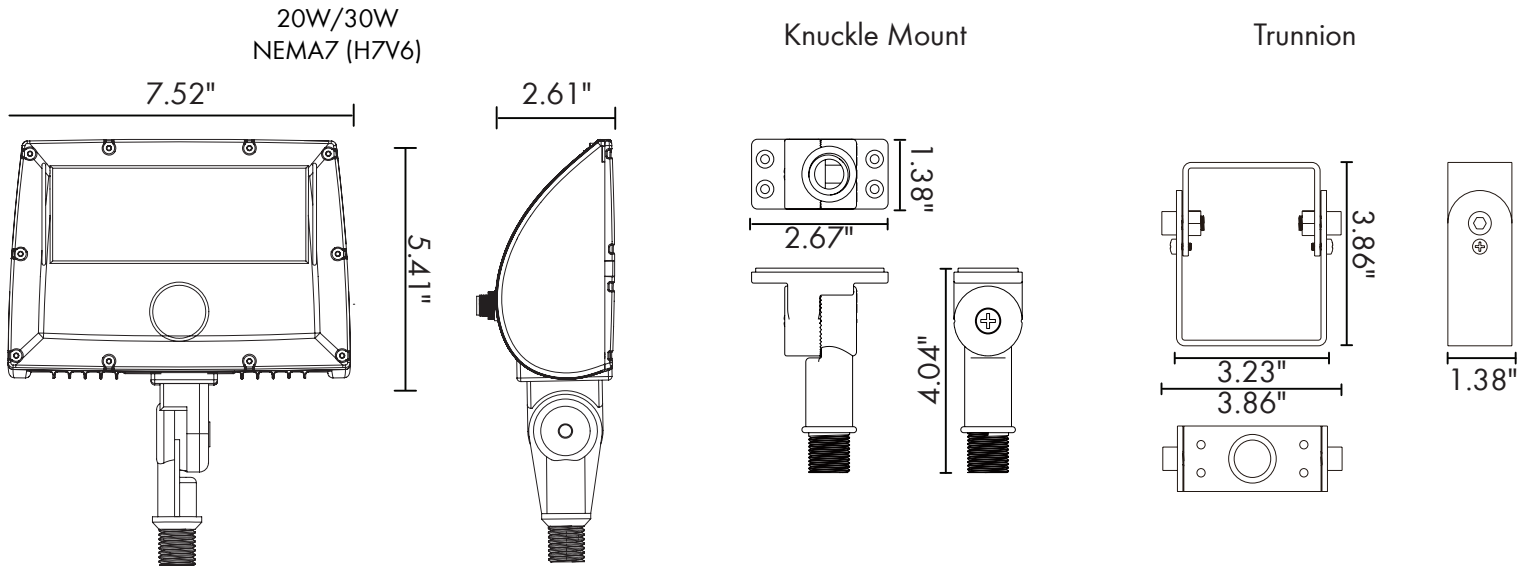

Weight: 5.5 lb.

LUMEN OUTPUT

SKU	Size	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
IPF-XS-20-50-U-D0-D-07-KN	Extra Small	20	2700	135
IPF-XS-30-50-U-D0-D-07-KN	Extra Small	30	4050	135

ELECTRICAL LOAD

System Watts	Current (A)					
	120V	208V	240V	277V	347V	480V
	Input Voltage					
20W	0.16	0.09	0.08	0.07	-	-
30W	0.25	0.14	0.12	0.10	-	-

ACCESSORIES



Top Visor  
[IPF-XS-TV]



Top Visor  
[IPF-XS-TV]



Wire Guard  
[IPF-XS-WG]



Button Photocell  
[Factory Installed]  
[PH]